




Technical Data—SERIES 730 Door Control Module

FEATURES:

- Key-Switch Operation
- Single Gang Mounting

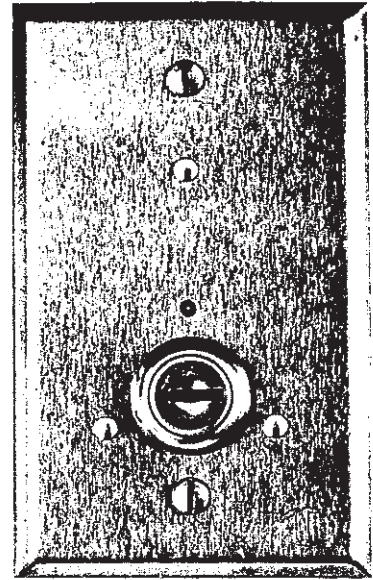

Catalog No. 926600-00

FUNCTION:

The **Auth Series 730 Door Control Module** is required at each location to be monitored. Key switch operated, the door control module places a monitored location into a supervised or unsupervised mode. In the supervised mode, through the operation of the key switch unit can reset all signals at the Door Security Annunciator upon activation of an alarm.

ENGINEERS' SPECIFICATIONS Door Control Module

Individual entrances or exits shall be equipped with a **Door Control Module** Auth Catalog No. 926600-00 as indicated on plans.

1. Door Control module shall permit door locations to be placed under or removed from supervision. If required two or more doors may be wired to be controlled from one door control mode.
2. Key switch operated, all door control modules shall be keyed alike with key removal either in the unsupervised or supervised mode.
3. Audible signal shall be silenced and lamp restored to

the normal LO-GLO mode either by momentarily operating key at the door control module or by momentarily pressing the illuminated lamp/button on the Annunciator Panel once door is restored to the normally closed position.

4. Screw type terminals shall be provided for system wiring termination.

5. Door Control Module shall be mountable on a single gang electrical backbox (Steel City #58371, Appleton #4SSL or equal). Surface mounting requirements shall be wiremold device No. 5744S or equal. Minimum backbox depth 2¼". Box shall be furnished by the installer.