

# Call for Assistance Kits CFA Series

The Edwards 7008B-N5 120 volt Call For Assistance Kit is designed for areas where a call-for-help device is required. The kit consists of a 7007B-N5 buzzer/strobe for audible and visual notification and a 6537 emergency pull cord station for activation. Each component may also be ordered individually.

### 7007B-N5 Buzzer/Strobe

The 7007B-N5 buzzer/strobe is designed for installation in a single gang 2" (51mm) x 4" (102mm) box located over doors. Each unit contains an audible signal which generates an 82 dBA sound pressure level at 10 ft. and a 150 cd strobe. The unit draws 115 mA.

### 6537 Pull Cord Switch

The 6537 pull cord switch provides emergency call activation and reset. It has a stainless steel face plate with a DPST switch.

### Features and Specifications

- Kit includes 7007B-N5 Buzzer/Strobe and 6537 Pull Cord Switch
- Double pole single throw switch
- Neutral white color
- Fits single gang box
- 92dB buzzer at 1 meter/82dB at 10ft.



### Ordering Information

Description	Cat. No.	Operating Voltage	Buzzer/Strobe		Lens Color	Strobe Candela
			Current	dBA at 1m/10ft.		
Call for Assistance Kit	7008B-N5	120V AC	0.115 A	92/82	Clear	150
	7008BA-N5	120V AC	0.115 A	92/82	Amber	120
	7008BB-N5	120V AC	0.115 A	92/82	Blue	51
	7008BG-N5	120V AC	0.115 A	92/82	Green	86
	7008BR-N5	120V AC	0.115 A	92/82	Red	74


6 CALL FOR ASSISTANCE



# Call for Assistance Kits CFA Series

## Technical Information

### Connecting 7008B-N5 Call for Assistance Kit

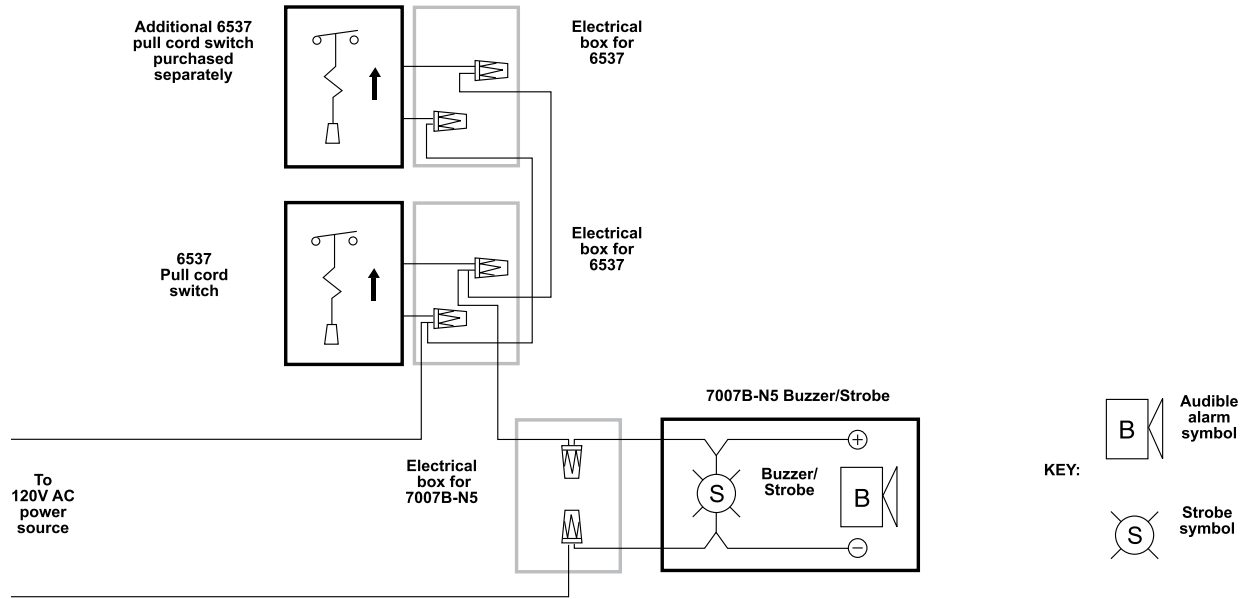

## Weights and Dimensions

Cat. No.	Approx. Net Weight (lb.)	Approx. Shipping Weight (lb.)
7008B-N5	0.50	0.90
7008BA-N5	0.50	0.90
7008BB-N5	0.50	0.90
7008BG-N5	0.50	0.90
7008BR-N5	0.50	0.90

