



FEATURES:

- Locking Pushbutton
- Red "Call-Placed" L.E.D.
- Faceplate Screened "Push For Help"
- Single Gang Mounting

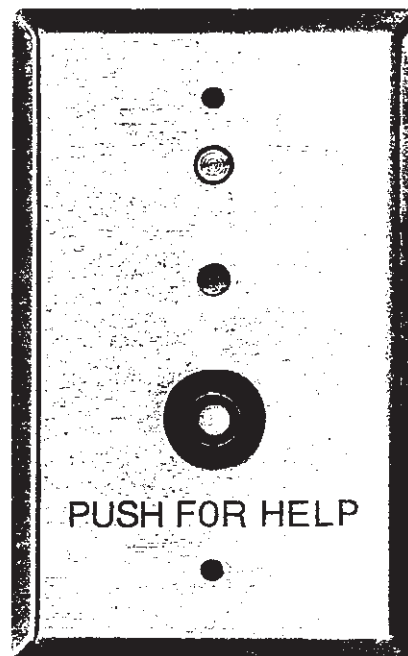

Catalog No. 945200-00

FUNCTION:

Located in toilet and bath areas, the **Auth Push Button Type Emergency Station** provides emergency call placement with reset capability, attainable only at the call—initiating station.

Designed with subplate construction the emergency station mounts on a single gang electrical backbox (consult specifications for manufacturer).

ENGINEERS' SPECIFICATIONS

The **Emergency Station** shall be Auth Catalog No. 945200-00 as indicated on plans.

1. **Emergency Station** shall be of the mechanically locking button type with a white call button and a concentric reset collar of shock resistant phenolic. Components shall be mountable to a subplate.

2. **Faceplate** shall be satin stainless steel screened "Push For Help."

3. **Emergency Station** shall be equipped with a red

"call-placed" light. (Lamp shall be L.E.D. type, GE 1820, 24 V.

4. **Emergency Station** shall be mountable on single gang electrical backbox. (Steel City #58371, Appleton #4SSL or equal). Surface mounting requirements shall be wiremold device #5744S or equal. Minimum backbox depth 2". Box shall be furnished by the installer.

5. The **Emergency Station** shall be Underwriters Laboratories Inc. listed (UL 1069).